


### Features

- Micropower consumption for battery powered applications
- Omnipolar, output switches with absolute value of North or South pole from magnet
- Operation down to 2.5V
- High sensitivity for direct reed switch replacement applications



3 pin SOT23 (suffix SO)



3 pin SIP (suffix UA)

### General Description

The SS3413-H Omnipolar Hall effect sensor IC is fabricated from mixed signal CMOS technology. It incorporates advanced chopper-stabilization techniques to provide accurate and stable magnetic switch points.

The circuit design provides an internally controlled clocking mechanism to cycle power to the Hall element and analog signal processing circuits. This serves to place the high current-consuming portions of the circuit into a “Sleep” mode. Periodically the device is “Awakened” by this internal logic and the magnetic flux from the Hall element is evaluated


against the predefined thresholds. If the flux density is above or below the Bop/Brp thresholds then the output transistor is driven to change states accordingly. While in the “Sleep” cycle the output transistor is latched in its previous state. The design has been optimized for service in applications requiring extended operating lifetime in battery powered systems.

The output transistor of the SS3413-H will be latched on (Bop) in the presence of a sufficiently strong South or North magnetic field facing the marked side of the package. The output will be latched off (Brp) in the absence of a magnetic field.

### Applications

- Solid state switch
- Handheld wireless handset awake switch
- Screen protection awake switch for battery powered devices
- Magnet proximity sensor for reed switch replacement in low duty cycle applications


### Typical Application Circuit

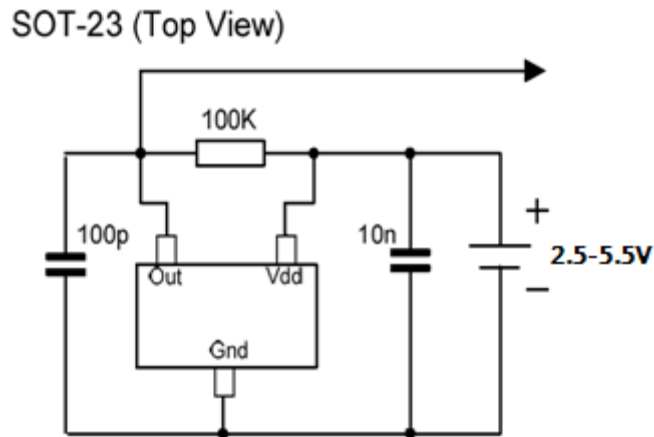

SEC's pole-independent sensing technique allows for operation with either a north pole or south pole magnet orientation, enhancing the manufacturability of the device. The state-of-the-art technology provides the same output polarity for either pole face. It is strongly recommended that an external bypass



capacitor be connected (in close proximity to the Hall sensor) between the supply and ground of the device to reduce both external noise and noise generated by the chopper-stabilization technique. This is especially true due to the relatively high impedance of battery supplies.

### Functional Block Diagram

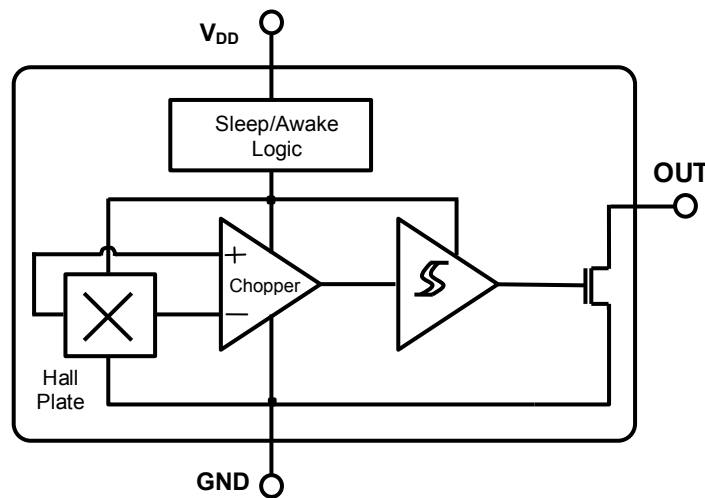


### Pin Definitions and Descriptions

SOT Pin №	SIP Pin №	Name	Type	Function
1	1	V <sub>DD</sub>	Supply	Supply Voltage pin
2	3	OUT	Output	Open Drain Output pin
3	2	GND	Ground	Ground pin

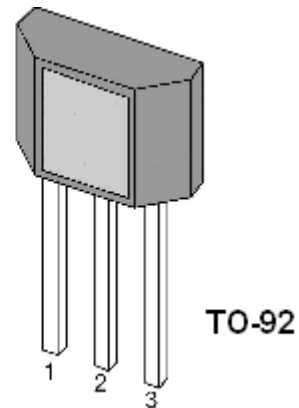

### Internal Timing Circuit

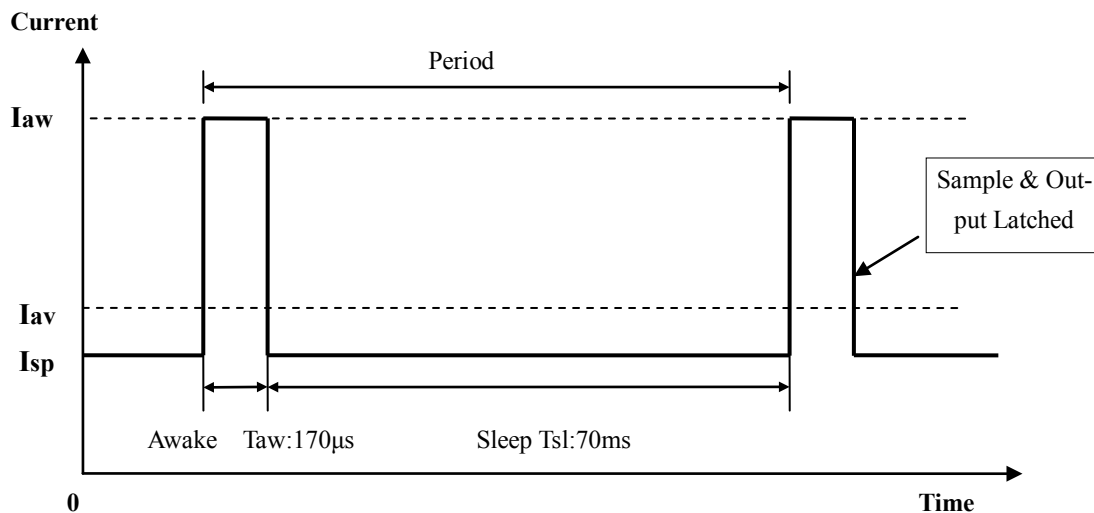

### Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Supply Voltage(operating)	$V_{DD}$	7	V
Supply Current	$I_{DD}$	5	mA
Output Voltage	$V_{OUT}$	7	V
Output Current	$I_{OUT}$	10	mA
Operating Temperature Range	$T_A$	-40 to 125	°C
Storage Temperature Rang	$T_S$	-50 to 150	°C
ESD Sensitivity	-	6000	V


Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum rated conditions for extended periods may affect device reliability.

### DC Electrical Characteristics

DC Operating Parameters:  $T_A = 25^\circ\text{C}$ ,  $V_{DD}=3\text{V}$ .

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Operating voltage	$V_{DD}$	Operating	2.5	3	5.5	V
Supply current	$I_{DD}$	Average		3		$\mu\text{A}$
Output Current	$I_{OUT}$				1.0	mA
Saturation Voltage	$V_{SAT}$	$I_{OUT}=0.8\text{mA}$			0.4	V
Awake mode time	$T_{AW}$	Operating		170		$\mu\text{S}$
Sleep mode time	$T_{SL}$	Operating		40	70	mS

### Magnetic Characteristics

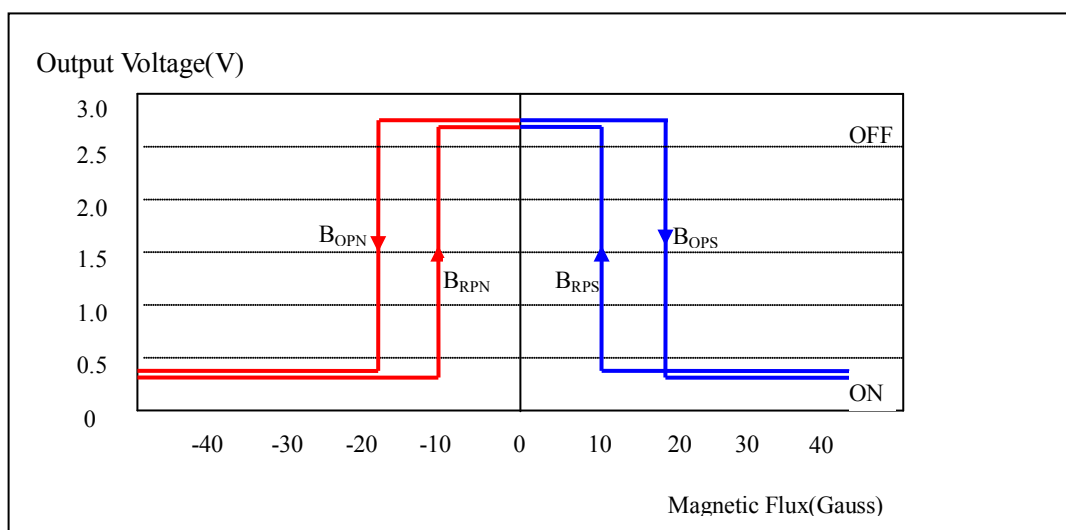

Operating Parameters:  $T_A = 25^\circ\text{C}$ ,  $V_{DD}=3\text{V}$ .


PARAMETER	Symbol	Min	Type	Max	Units
Operating Point	$B_{op}$	-	+/-18	+/-23	Gs
Release Point	$B_{rp}$	+/-5	+/-10	-	Gs
Hysteresis	$B_{hys}$	-	8	-	Gs

### ESD Protection

Human Body Model (HBM) tests according to: Mil. Std. 883F method 3015.7

Parameter	Symbol	Limit Values		Unit	Notes
		Min	Max		
ESD Voltage	$V_{ESD}$		$\pm 6$	kV	

### Performance Characteristics

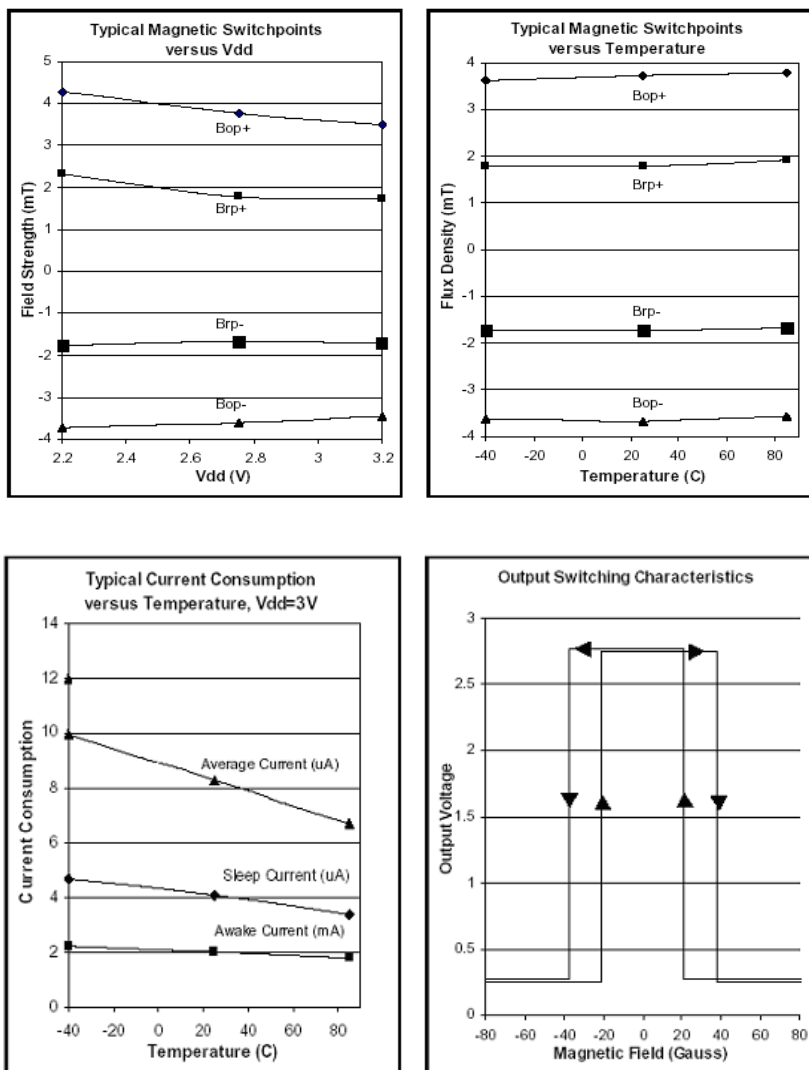

### Unique Features


#### CMOS Hall IC Technology

The chopper stabilized amplifier uses switched capacitor techniques to eliminate the amplifier offset voltage, which, in bipolar devices, is a major source of temperature sensitive drift. CMOS makes this advanced technique possible. The CMOS chip is also much smaller than a bipolar chip, allowing very sophisticated circuitry to be placed in less space. The small chip size also contributes to lower physical stress and less power consumption.

## Installation Comments

Consider temperature coefficients of Hall IC and magnetics , as well as air gap and life time variations. Observe temperature limits during wave soldering. Typical IR solder-reflow profile:

- No Rapid Heating and Cooling.
- Recommended Preheating for max. 2minutes at 150°C
- Recommended Reflowing for max. 5seconds at 240°C

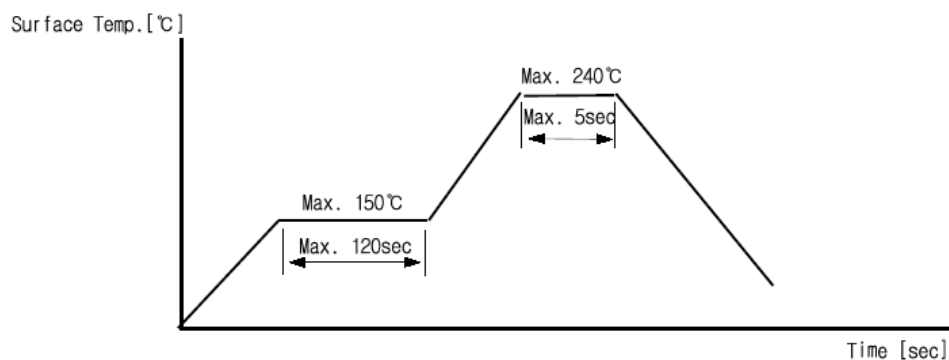


## ESD Precautions

Electronic semiconductor products are sensitive to Electro Static Discharge (ESD). Always observe Electro Static Discharge control procedures whenever handling semiconductor products.

## Package Information

Package SO, 3-Pin SOT-23:


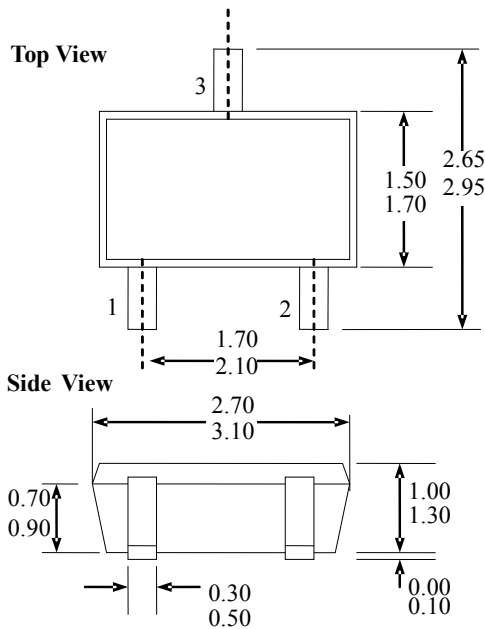


**Notes**


- PINOUT:** Pin 1  $V_{DD}$   
Pin 2 Output  
Pin 3 GND
- All dimensions are in millimeters;

## SOT-23 Package Hall Location

**Bottom View of SOT-23 Package**

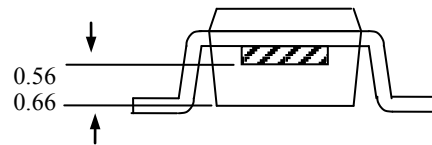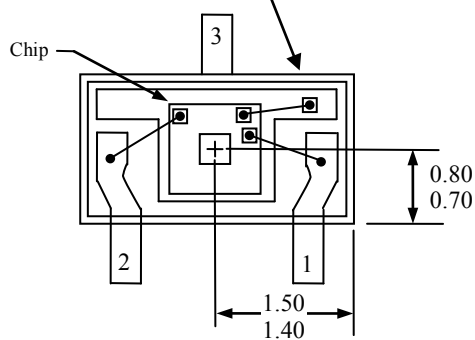


### Package ST, 3-Pin TSOT-23:

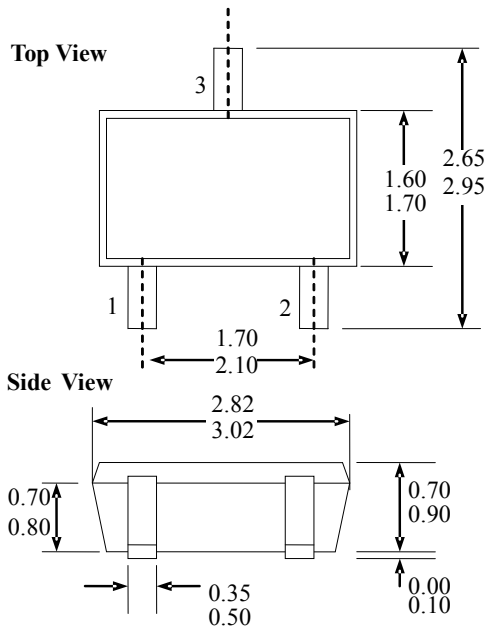

**Notes**



- 1). PINOUT: Pin 1  $V_{DD}$   
Pin 2 Output  
Pin 3 GND
- 2). All dimensions are in millimeters;

**End View**

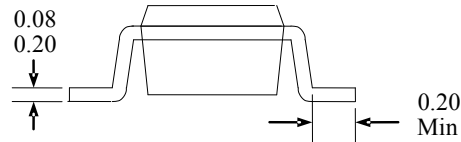


### TSOT-23 Package Hall Location

**Bottom View of TSOT-23 Package**

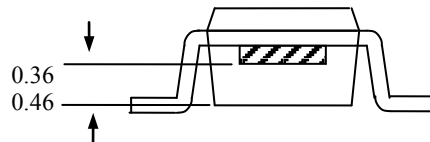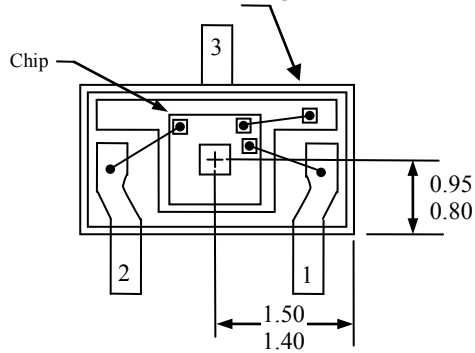



**Package UA, 3-Pin SIP:**

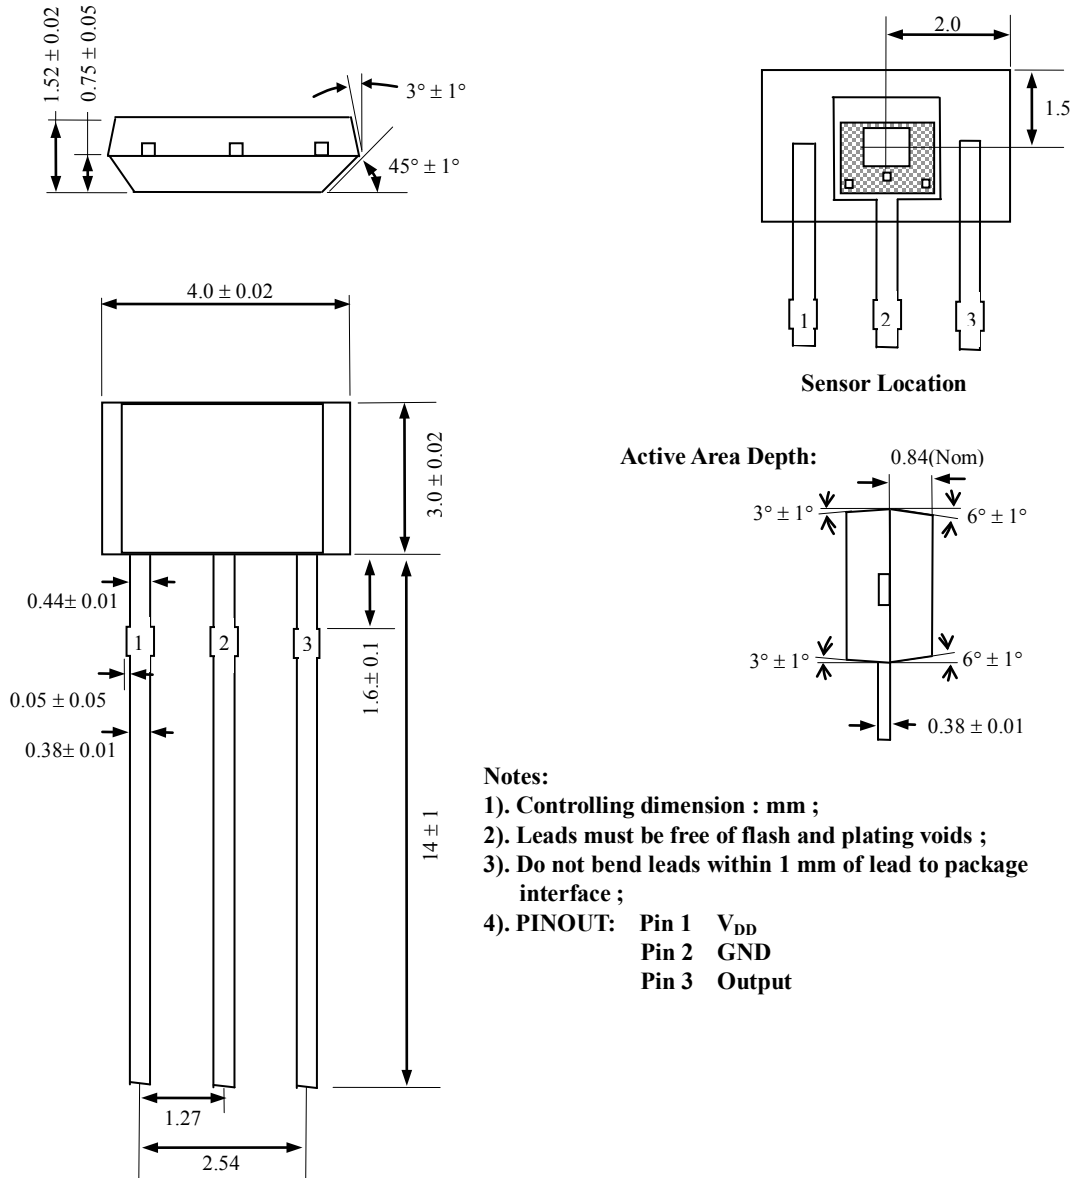

**Notes:**

- 1). Controlling dimension : mm ;
- 2). Leads must be free of flash and plating voids ;
- 3). Do not bend leads within 1 mm of lead to package interface ;
- 4). PINOUT: Pin 1  $V_{DD}$   
Pin 2 GND  
Pin 3 Output

**Ordering Information**

<b>Part No.</b>	<b>Pb-free</b>	<b>Temperature Code</b>	<b>Package Code</b>	<b>Packing</b>
SS3413-HESOT	YES	-40°C to 85°C	SOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HESTT	YES	-40°C to 85°C	TSOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HEUA	YES	-40°C to 85°C	TO-92	Bulk, 1000 pieces/ bag
SS3413-HKSOT	YES	-40°C to 125°C	SOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HKSTT	YES	-40°C to 125°C	TSOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HKUA	YES	-40°C to 125°C	TO-92	Bulk, 1000 pieces/ bag
SS3413-HLSOT	YES	-40°C to 150°C	SOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HLSTT	YES	-40°C to 150°C	TSOT-23	7-in. reel, 3000 pieces/ reel
SS3413-HLUA	YES	-40°C to 150°C	TO-92	Bulk, 1000 pieces/ bag